

VEVOR[®]
TOUGH TOOLS, HALF PRICE

F-CLAMP

Model:F150-6 / F150-12



Model:F300-12 / F300-24



NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate
www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there is any technology or software updates on our product.

INSTRUCTIONS

Thank you very much for choosing this F-clamp. Please read all of the instructions before using it. The information will help you achieve the best possible results.



Warning-To reduce the risk of injury, user must read instructions manual carefully.

WORK AREA

1. Operate in a safe work environment. Keep your work area clean, well-lit and free of distractions.

PERSONAL SAFETY

WARNING! Always Wear personal protective equipment.

PERSONAL PRECAUTIONS

Control the F-clamp, personal movement and the work environment to avoid personal injury or damage to F-clamp.

1. Do not operate any F-clamp when tired or under the influence of drugs, alcohol or medications.
2. Avoid wearing clothes or jewelry that can become entangled with the moving parts of a tool. Keep long hair covered or bound.

SPECIFIC SAFETY PRECAUTIONS

1. Use the correct F-clamp for the job. This F-clamp was designed for a specific function. Do not modify or alter this F-clamp or use it for an unintended purpose.
2. Keep body parts away from pinch areas while using.
3. Children are not allowed to operate this product unless accompanied by an adult
4. Pay attention to safety during use to avoid crushing fingers.


WARNING!

DO NOT let comfort or familiarity with product (gained from repeated use) replace strict adherence to the tool safety rules. If you use this tool unsafely or incorrectly, you can suffer serious personal.

Model and Parameters

Model	F150-6	F150-12	F300-12	F300-24
Flamping Force	150lbs	150lbs	330lbs	330lbs
Maximum Clamping Size	6inches (15.24cm)	12inches (30.48cm)	12inches (30.48cm)	24inches (60.96cm)
Throat Depth	2-3/8" (6.03cm)	2-3/8" (6.03cm)	3-1/3" (8.46cm)	3-1/3" (8.46cm)


Structure Diagram

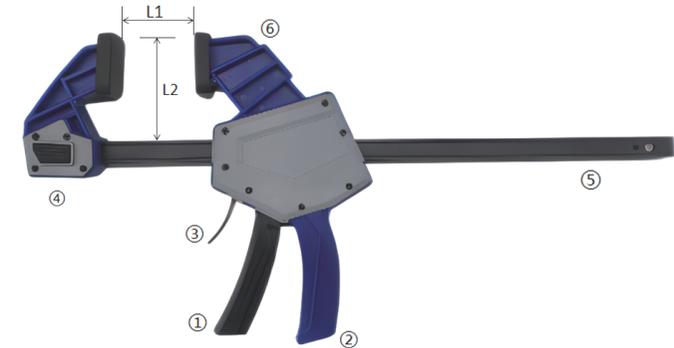

①Trigger Handle ②Handgrip ③Braking Lever
④Fixed Jaw Assembly ⑤Slide Bar ⑥ Movable Jaw Assembly
L1:Clamping Size L2:Throat Depth

Assembly and Use

1. When the trigger handle ① is squeezed between a user's hand (not shown) and the handgrip ②, the movable jaw assembly ⑥ moves in the direction of the arrow ←.
2. By squeezing the Braking Lever ③ thoroughly, the movable jaw assembly ⑥ can be moved in the direction of the arrow → by hand.
3. Press this button. Fixed jaw assembly ④ can be unloaded and Assemble to the other end of the slide bar as shown.

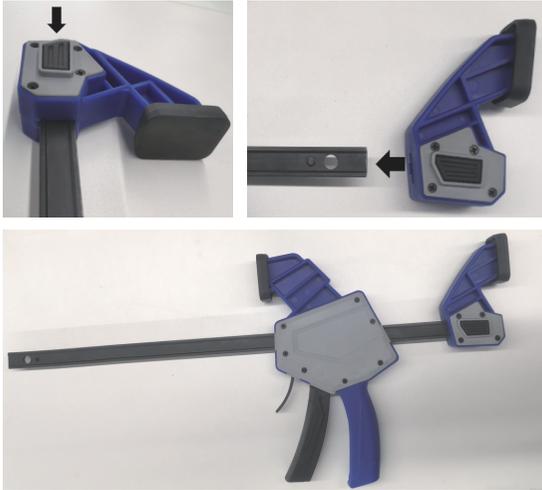

Troubleshooting Instruction

Problem	Reasons	Solution
Movable jaw assembly does not move smoothly.	Insufficient lubrication.	Add oil to lubricate the rotating parts.

Maintenance

- 1.Avoid prolonged exposure to the sun to avoid aging.
- 2.Overload and partial load are prohibited.

VEVOR[®]
TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate
www.vevor.com/support

F-CLAMP

We continue to be committed to provide you tools with competitive price. "Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us.

You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR[®]
TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate
www.vevor.com/support