

# **VEVOR<sup>®</sup>**

## **TOUGH TOOLS, HALF PRICE**

Technical Support and E-Warranty Certificate

[www.vevor.com/support](http://www.vevor.com/support)

## **FLOOR CUTTER**

### **MODEL: 8503-120**

We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.




# VEVOR<sup>®</sup>

TOUGH TOOLS, HALF PRICE

## FLOOR CUTTER

MODEL: 8503-120

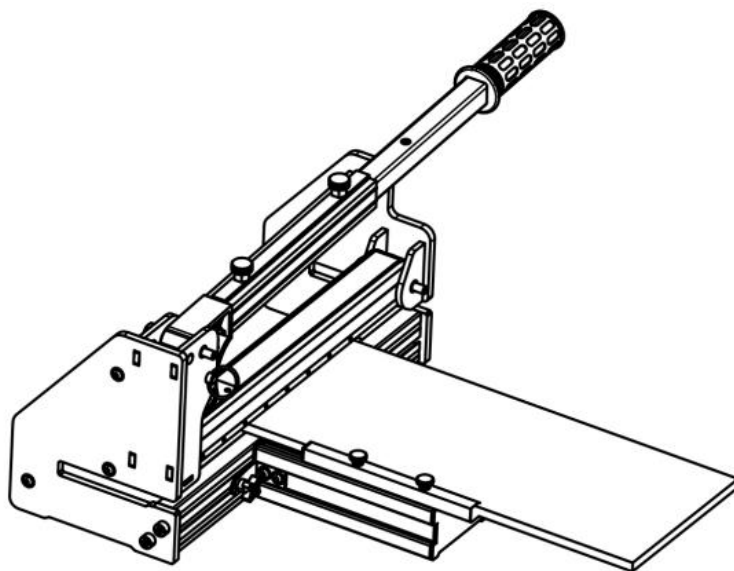

### NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

**Technical Support and E-Warranty Certificate**  
**[www.vevor.com/support](http://www.vevor.com/support)**


This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.









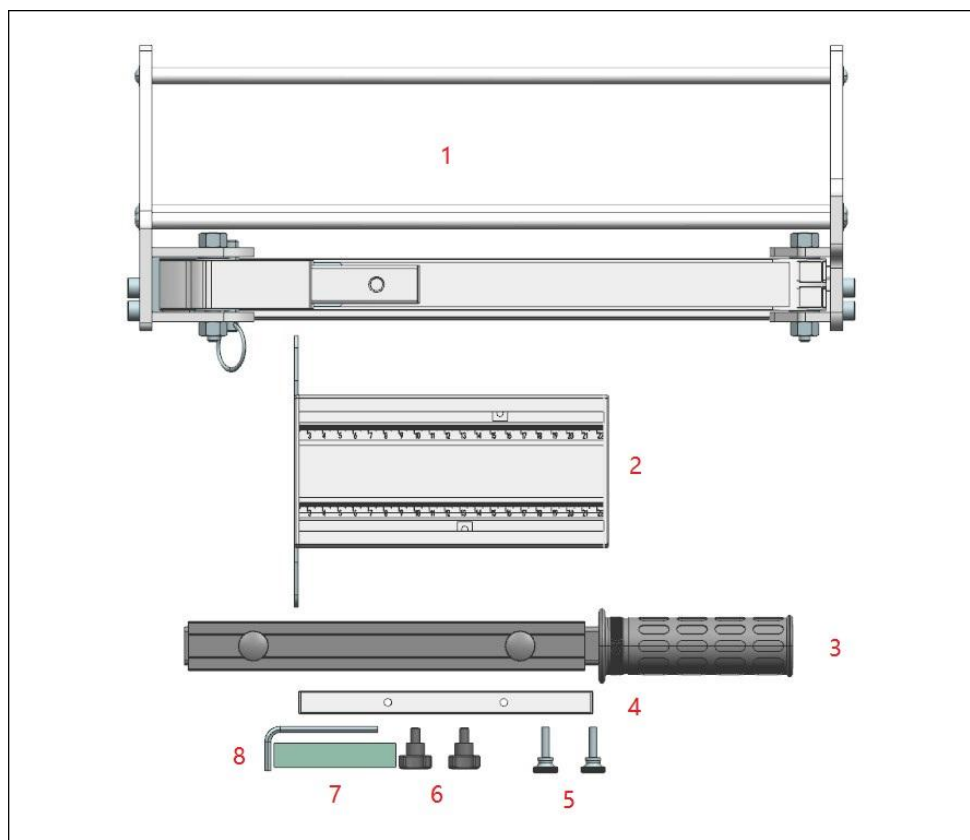

Warning-To reduce the risk of injury, user must read instructions manual carefully.

## TECHNICAL PARAMETERS

Model	8503-120
maximum cutting thickness	12
Cutting type	Length straight cut/oblique straight cut/corner straight cut/width cut
Product size (mm)	480*190*240
Net weight (kg)	12.5



number	name	quantity	picture
1	framework	1	
2	shelf	1	
3	pressure bar	1	
4	square pipe	1	
5	Hand screw	2	
6	Cross-type dial screws	2	
7	millstone	1	
8	inner hexagon spanner	1	

## SAFETY INSTRUCTIONS



**WARNING: FAILURE TO FOLLOW THESE RULES MAY RESULT  
IN SERIOUS INJURY! USING THIS MACHINE WITH RESPECT AND CAUTION  
WILL CONSIDERABLY LESSEN THE POSSIBILITY OF PERSONAL INJURY.**


# SAFETY RULES FOR THE FLOORING CUTTER

## READ AND UNDERSTAND THIS INSTRUCTION MANUAL BEFORE OPERATING THE MULTI-FLOORING CUTTERS.

1. Stay alert. Do not operate under the influence of drugs, alcohol, or medication.
2. Always wear safety approved eye protection with side shields(ANSI Z87.1)
3. Keep the work area free of debris.
4. Keep children and unauthorized persons away from the Multi-flooring Cutter and work area.
5. Make sure the tool is secure. Operate only on a firm substrate or solid stand.
6. Use the right tool. Do not force the Multi-flooring Cutter or use it for a job it was not designed; use only on approved materials.
7. Keep the blade sharp. A dull blade will not perform properly.
8. Always keep hands away from the blade while operating or carrying the cutter.
9. Do not alter or misuse this tool. The Multi-flooring Cutter is precision built; modifications not specified in this manual may result in a dangerous and unsafe environment.
10. Maintain the Multi-flooring Cutter with care. Keep the blade sharp and clean. Follow instructions for changing accessories.
11. Use only recommended accessories. The use of improper accessories may be hazardous and cause injuries.
12. Never leave the Multi-flooring Cutter unattended. Secure the handle with the lock chain when not in use.
13. Warning - To reduce the risk of injury, Wear ANSI-approved safety goggles and heavy-duty work gloves during using.




## SET UP

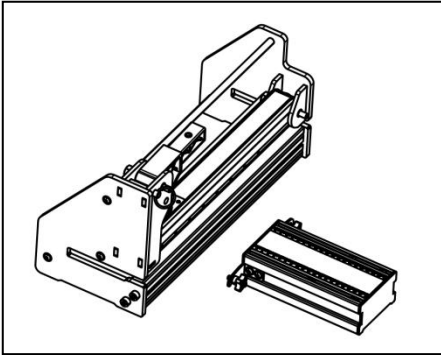

### Installation of the support plate

Connect the support plate to the cutter as shown.


**Warning:** Do not put your fingers against the sharp edge of the blade at any time.

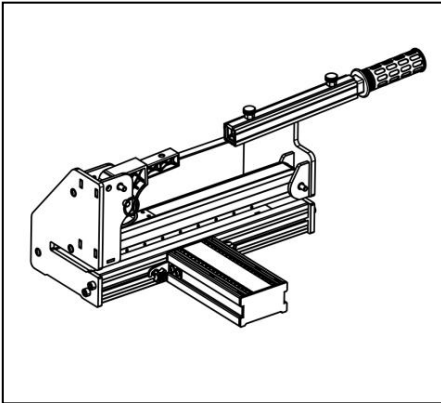

### Installation of the handle

Pull up the lock pin on the aluminum handle as shown and insert the handle base into the handle as shown. Push down the handle to pull the spring pin from the lower hole and insert it into the upper hole. Screw the square pipe on the auxiliary plate for use.

**Warning:** Do not put your fingers against the sharp edge of the blade at any time.

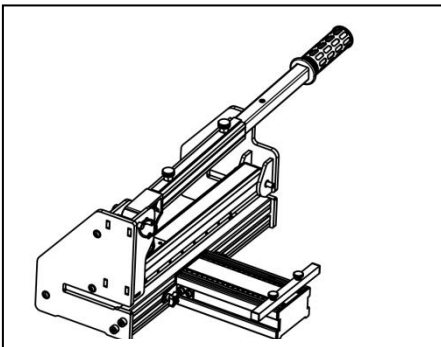


### Cutting Preparation

\* Adjust the angle attachment to the desired angle as needed.

\*The angle attachment can be used on the left side of the tables as shown. **Warning:** Do not put your fingers against the blade's sharp edge at any time.


## CUTTING

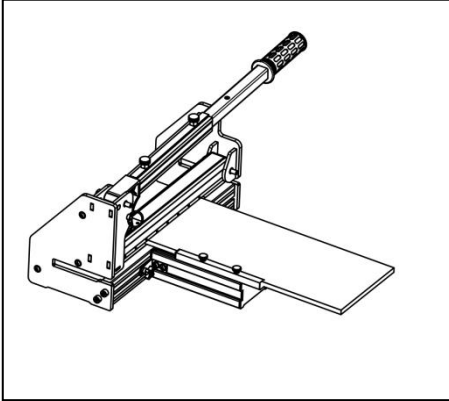

### Straight Cutting

Insert material between the cutting blade and the base, flush with the angle attachment as shown and hold the material with foot then push handle down to complete a cut.  
\*Blade cutting maximum width: 300mm \*Blade cutting maximum depth: 12mm


**Warning:** Maintain control of the handle. Do not allow handle to slam back after making a cut.

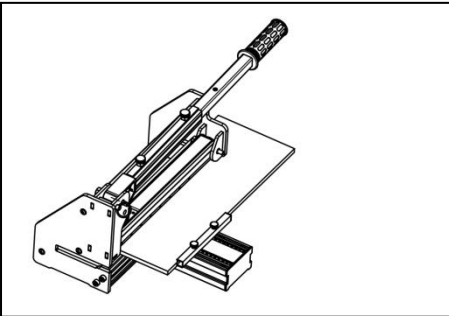

### Lengthwise Cutting

Insert material between the cutting blade and the base, flush with the angle attachment as shown, and then push the handle down to complete a cut.

**Warning:** Maintain control of the handle. Do not allow handle to slam back after cutting.

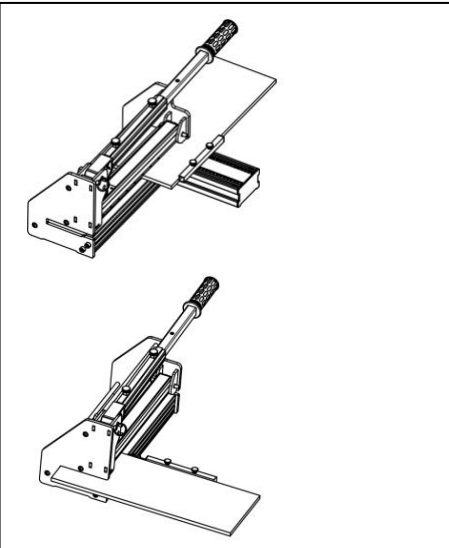

### "L" Cutting



#### 1st cut

Insert material between the cutting blade and the base at the end of the machine, flush with the angle attachment as shown, and then push the handle down to complete a cut.

#### 2<sup>nd</sup> cut

Insert material between the cutting blade and the base at the machine's front end, flush with the angle attachment as shown, and then push the handle down to complete a cut.




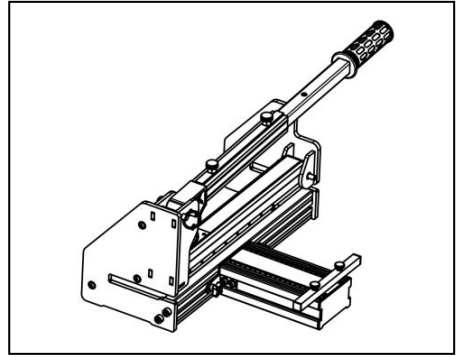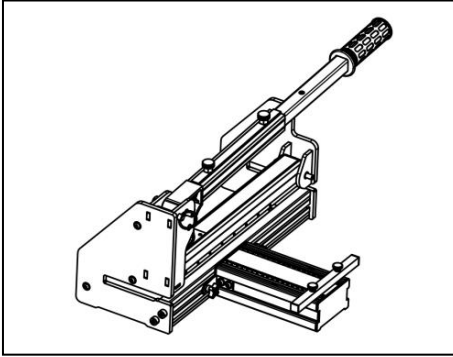


## CHANGING THE BLADE

**Warning:** Do not put your fingers against the sharp edge of the blade at any time.


Step 1: press the pressure rod down to the bottom, and replace the insurance plug pin from the top to the bottom;

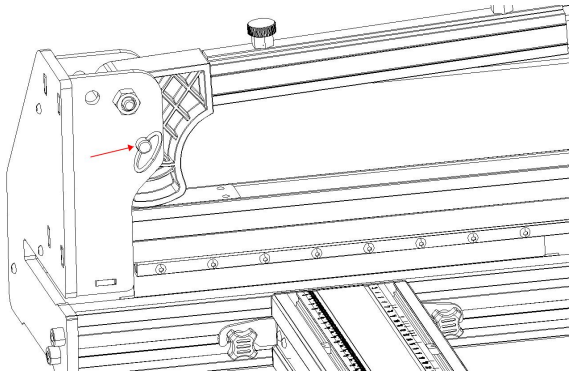


Step 2: Turn the screw to fix the blade counterclockwise;

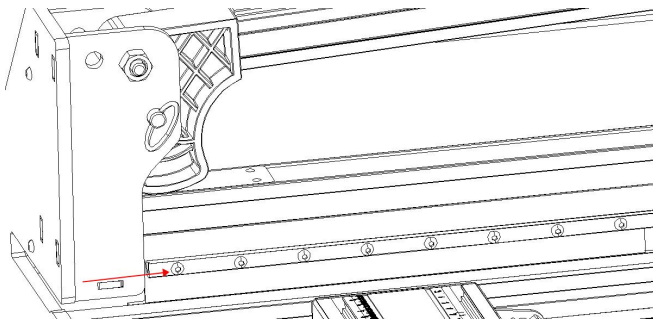

Step 3: pull out the safety plug, the blade falls off after lifting the pressure rod;

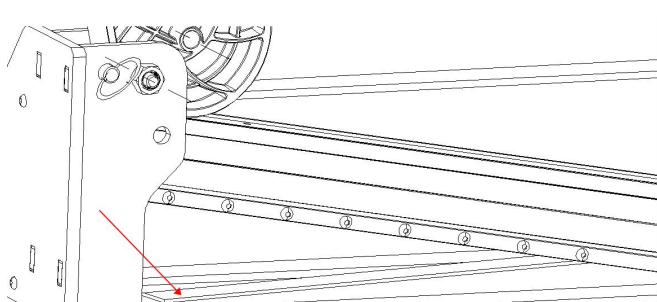

Step 4: Put the new blade plane toward the connecting rod into the slot and tighten the fixing screw.

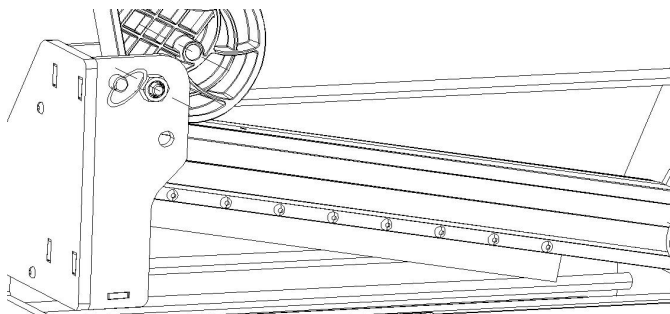

**Made In China**



**VEVOR**<sup>®</sup>

**TOUGH TOOLS, HALF PRICE**

**Technical Support and E-Warranty Certificate**

**[www.vevor.com/support](http://www.vevor.com/support)**