

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate www.vevor.com/support

FUEL CADDY USER MANUAL

Model:JGC30E

We continue to be committed to provide you tools with competitive price.


"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Fuel Caddy

MODEL: JGC-30E

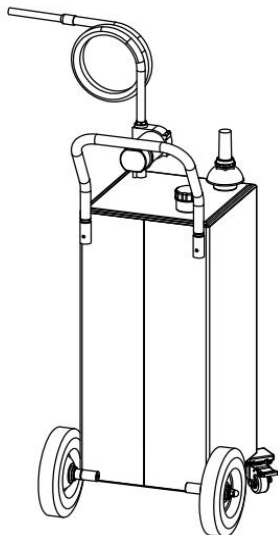

NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

✉ CustomerService@vevor.com

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

▲WARNING

1. Read carefully and understand all **ASSEMBLY AND OPERATION INSTRUCTIONS** before operating.
2. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

GENERAL SAFETY RULES

When using this product, basic precautions should always be followed, including the following;

- This product is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities or lack of experience and knowledge unless they have been given supervision or instruction concerning the use of the product by a person responsible for their safety.
- Do not use this product other than intended use.
- Wear proper protective equipment when installing or using this product.
- Ensure all fittings and threaded connections are tightened and leak-free before operating.

A DANGER!

Fuels are extremely flammable. Keep away from heat sparks and open flames.

- Do not use electronics or mobile communications devices such as mobile phones when pumping flammable liquids.
- Attach ground wire and bond containers being pumped from and into. Ground all containers to a known ground source to dissipate static

electricity before pumping liquids.

- Fuel vapors can explode. Harmful or fatal if swallowed. Avoid breathing in fuel vapors.
- Do not smoke near or while using the fuel caddy.
- This product is intended for fuel transfer only and is not designed to transport fuel in any vehicle or trailer.
- Do not modify this product.

A WARNING! CAUTION! ATTENTION!

- Do not use this product for prop-longed fuel storage.
- Use the caddy for one fuel type only to avoid possible damage.
- Monitor flow rate and fill level to prevent overflows and spills.
- Always empty the pump and hose after using the caddy. Lift the hose and turn the handle onto the opposite direction to empty all remaining liquid back into the caddy.
- Caution when filling the caddy through the fill tube, monitor closely to prevent overflows or spills.
- This product is unsuitable for placing in a yacht, off-road vehicle, and other violent vibration places.




Never use the fuel caddy near open flames or heat sources.

SAVE THESE INSTRUCTIONS

MODEL AND PARAMETERS







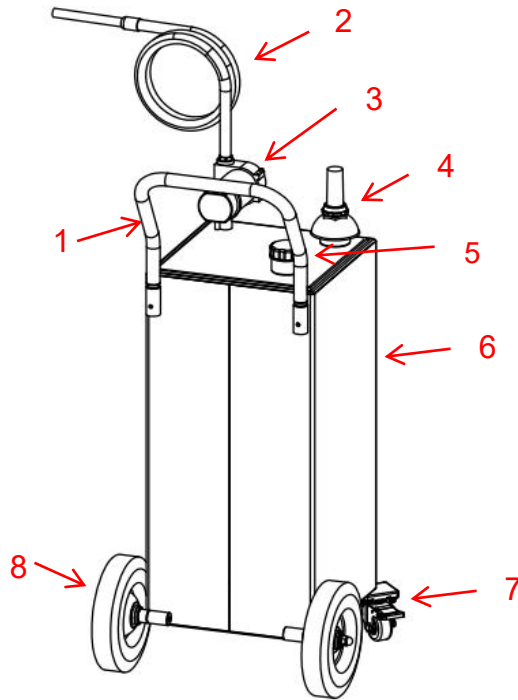










Model	JGC30E
Capacity	30 Gallons
Fuel Type	Diesel,Lubricating Oil, Machine Oil
Pump	Input: DC12V Power: 180W
Max. Flow	23.5 L/min
Hose	Φ19(Inside Diameter)xL250cm
Wheel	2.5"(Front) ; 10"(Back)
Material	Steel
Color	Red

STRUCTURE DIAGRAM




1. Handle 2. Hose 3. Pump 4. Oil Dip Rod 5. Fuel Tank Cap
6. Fuel Tank 7. Swivel Caster (Front) 8. Fixed Wheel (Back)

COMPONENTS


No.	Picture	Name and Qty	No.	Picture	Name and Qty
1		Fuel Tank(x1)	10		Lock Nut(x1)
2		Handle (x1)	11		Hose Clamp(x1)
3		Fixed Wheel (x2)	12		Wheel shaft (x2)
4		Hose (x1)	13		Oil Gauge Fixing Nut (x1)
5		Swivel Caster (x2)	14		Oil gauge (x1)
6		Pump (x1)	15		Hose Fitting(x1)
7		Swivel Caster Film (x2)	16		Flat Gasket(x2)
8		Raw Tape(x1)	17		Acorn Nut M12(x2)
9		Grounding Wire (x1)	18	/	User Manual(x1)

ASSEMBLY


Step 1: Install the fixed wheels. Screw the wheel shafts(12) into the fuel tank, then put the fixed wheels (3) into the wheel shafts and lock them with gaskets and nuts.(16+17)

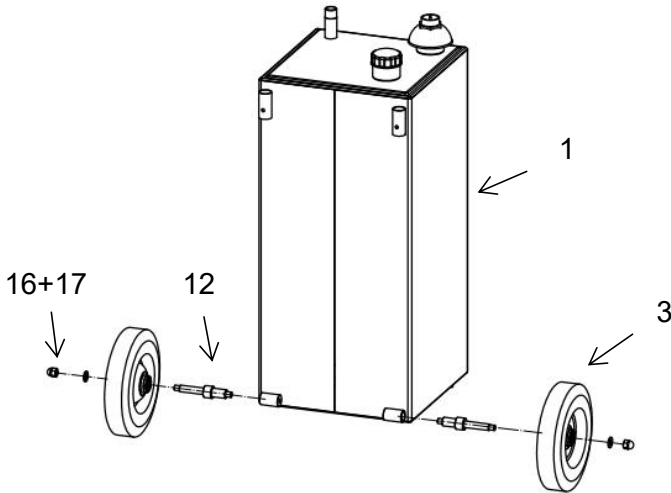


Step 2: Unscrew the nuts first, then install the swivel caster Films(7) and the swivel casters(5). Screw the nuts.

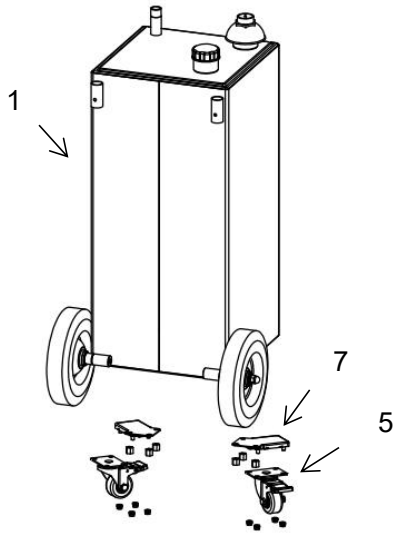


Step 3: Screw the lock nut(10) into the oil outlet, Wrap not less than 5 circles of raw material on the outlet, then screw the pump(6) on the outlet and adjust the orientation, and last, lock the pump with the lock nut. Remove the screw on the pump and install the grounding wire(9) on the pump with this screw.

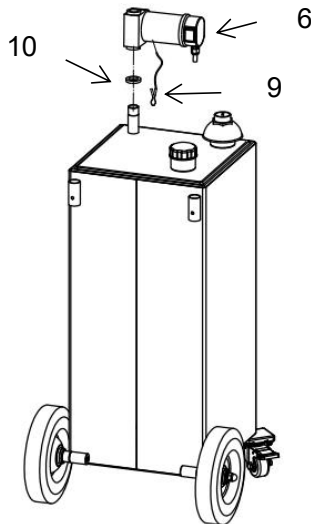


Step 4: Lock the oil gauge(14) on the pump with the oil gauge fixing nut(13), as shown.

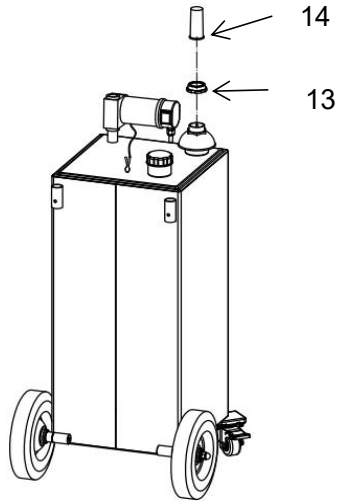


Step 5: Insert the handle(3) into the tank at the appropriate position, as shown.

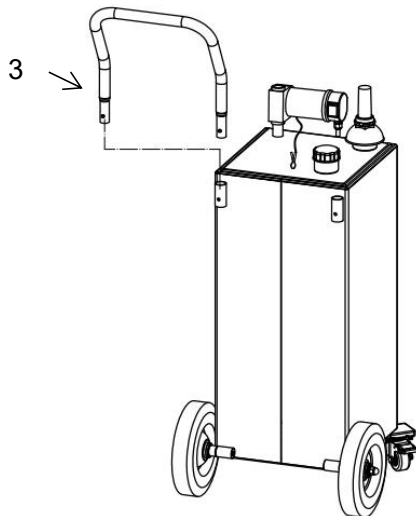

Step 6: Wrap not less than 5 circles of raw material on the hose fitting(15) and screw it to the pump outlet. Then attach the hose to the hose fitting and lock it with a hose clamp(11).

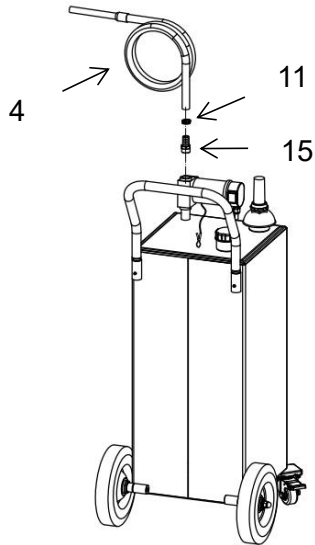

Step 7: The product is assembled and ready for use.

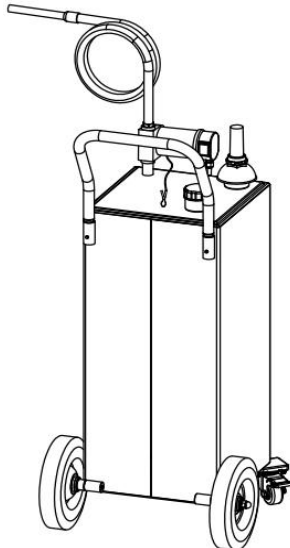

OPERATION

Refueling operation:

- Please choose the appropriate oil filling, do not fill with water, gasoline, or other corrosive solvent.
- Do not leave the oil pump empty for more than 1 minute to avoid damage to the oil pump
- When filling oil, please do a good job of grounding; Connect the clipper of grounding wire to a good earthing terminal and ensure user safety;
- Open the tank cap, and put the oil into the caddy through the oil inlet. For the first time usage, please eliminate air while noticing the measure shows.
- Please do not add the oil beyond the capacity. When the red pointer reaches the highest limit, do not add oil anymore.
- After filling the tank, tighten the cap and keep the tank upright.

Pumping operation:

- Before pumping oil, ground the grounding wire of the fuel tank.
- Ensure that the power supply is 12V DC; Connect the red line of the pump to the positive pole and the black line to the negative pole.
- Turn on the switch of the pump to pump oil.

MAINTENANCE

1. Please clean the measure and filter regularly.
2. Operate the machine in a horizontal position, do not incline;
3. Keep away from fire.
4. For different types of oil, it is recommended to clean the tank before storing another type of oil.
5. If this product is not used for a long time, it is recommended to clean and store it in a cool and dry environment

Made in China

VEVOR[®]

TOUGH TOOLS, HALF PRICE

TechnicalSupport and E-Warranty Certificate

www.vevor.com/support