

# **VEVOR<sup>®</sup>**

## **TOUGH TOOLS, HALF PRICE**

Technical Support and E-Warranty Certificate    [www.vevor.com/support](http://www.vevor.com/support)

## **RATCHET POWER PULLER**

**MODEL: KH2000B**

We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

# VEVOR<sup>®</sup>

TOUGH TOOLS, HALF PRICE

## RATCHET POWER PULLER

**MODEL: KH2000B**



### NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

**Technical Support and E-Warranty Certificate**  
**[www.vevor.com/support](http://www.vevor.com/support)**

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

## SAFETY INSTRUCTIONS

### WARNING

1. Do not use the ratchet power puller when the vehicle is in gear or in the "P" (parking brake) position, this may damage the vehicle's transmission.
2. Before use, the cable should be straightened out and should not be twisted to avoid breaking the rope.
3. Keep hands, clothing, hair, and jewelry clear of the cable/gear when using the ratchet power puller.
4. Do not wrap the cable around the load and do not hook the load directly onto the cable. This could damage the load and twist or fray the cable.
5. Do not use the ratchet power puller if the cable is frayed, twisted or damaged.
6. Do not allow anyone to stand near the cable/in the cable pulling line/behind the hand puller while it is on.
7. Never pass over hand puller or steel cable during use.
8. Against the parameter table, do not overload fracture tension !
9. Never use other levers or tubes to put force on the tightener handle.
10. It is prohibited to subject the wire tightener to sudden shock loading energy.
11. It is prohibited to let the wire rope over/close to or around the corner sharp corner, which will cause the wire rope to be cut off.
12. The product is solely for pulling purposes on loads or to pull two cables together within the product's own technical specs.
13. The product is not intended for hauling floating vessels, nor not for professional and/or industrial applications.
14. Do not use the ratchet power puller for hoisting or lifting operations as for this type of application hoists must comply with particular safety requirements.
15. The ratchet power puller shown in this operation manual is not intended for the transportation of persons.

## MODEL AND PARAMETERS



<b>Model</b>	KH2000B
<b>Capacity</b>	2T
<b>Rope Type</b>	Wire Rope
<b>Rope Diameter/Length</b>	Φ5mm/3.65m
<b>Description</b>	2 Hooks&Double Gear
<b>Double Rope Span</b>	2.1m
<b>Breaking Tension</b>	2.5T

## STRUCTURE DIAGRAM



1.Handle 2.Pawl Spring Switch 3.Drive Pawl 4.Ratchet 5.Stop Pawl  
Trigger 6.Anchor Hook 7.Load Hook 8.Wire Rope 9.Guard

## COMPONENTS

No.	Pictu re	Name	Qty
1		Ratchet Power Puller	1
2		User Manual	1

## OPERATION

**CHECK THE HAND PULLER CAREFULLY BEFORE USING IT !**

**Suggestion:** The best way to get acquainted with how the hand puller operates is to carry out a few test runs before you actually use it.


**Note:** It may be difficult to pull out the rope if it is fully packed. Please reserve an appropriate length outside !

**Step 1:** Switch the pawl spring to upper unlock position in order to release the pawl.




Flip up to unlock.

**Step 2:** Flip the handle to the opposite side, hold the trigger simultaneously, the wire rope can be pulled out.

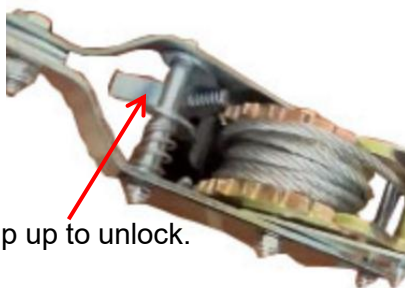

Flip up to unlock.




**Step 3:** Reset the handle, switch the pawl spring back to original position to lock the pawl.



Flip down to lock.

**Step 4:** The wire rope will be retracted when you push and pull the handle back and forth.

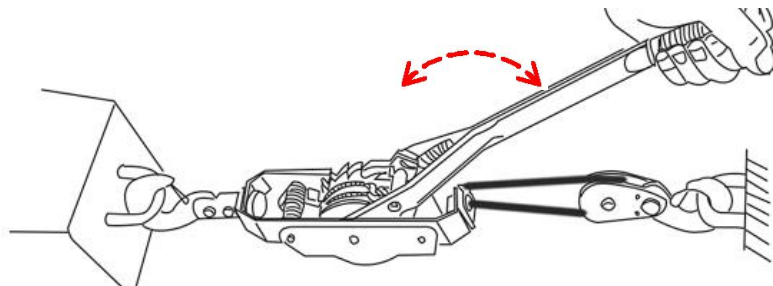

**Note:** In case of stacking the wire rope on one side, you may use your finger to guide the rope while retracting.

## MAINTENANCE

1. Lubricate the wire rope regularly and check for wear and broken wire.
2. Be sure to wipe the product with a dry cloth after use in harsh environments, such as bad weather or by the sea.
3. Keep away from fire.

# **VEVOR<sup>®</sup>**

**TOUGH TOOLS, HALF PRICE**

**TechnicalSupport and E-Warranty Certificate**

**[www.vevor.com/support](http://www.vevor.com/support)**